




The power supply is housed in a robust, compact wall mounted steel fabricated case lift-off hinged front panel. In the event of a mains power failure, standby power is automatically provided from battery charging output.

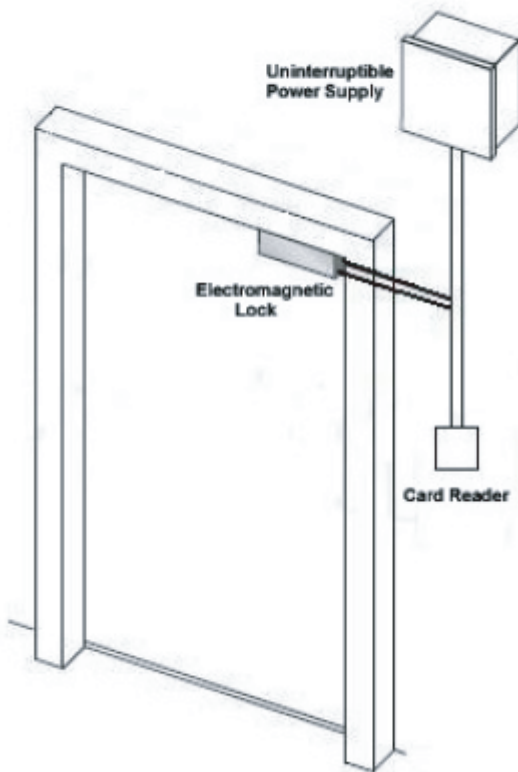

FEATURES :

- Linear auto charging power supply.
- 3Amp DC power supply output.
- Filtered & Circuit protection on PCB board.
- Short circuit protection.
- Built-in backup battery charger for uninterruptible.
- Buzzer indicator on low voltage.

SPECIFICATIONS :

- Input Voltage: 220 - 240V AC
- Input Frequency: 50/60Hz
- Output No Load Voltage: 13-13.8V DC
- Output Rated Voltage: 13V DC
- Output Rated Current: 3.0Amp
- Low Battery Buzzer Indication: 9.5V DC
- Operation Temperature: 0-65C
- Dimension (LxHxW)mm: 235x235x90
- Casing Finishing: Epoxy Powder Coating

Disclaimer :

Weserhoch reserve the right to go ahead with any modifications of models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication.